

# KJD17

ELECTROMAGNETIC SWITCH 电磁开关

**Applications:**

Integration switch with restart and undervoltage protection. If Power supply falls down, switching contacts open, The patent of switch is high current in small size.

**Specifications:**



TUV(EN60947)  
 Rated Voltage: 120V~ 220-250V~  
 Rated Current: 16 (12) A AC-1:1.8A AC-3:15A  
 Uc: 220-240V~  
 Rated Frequency: 50/60Hz  
 Number of Operating Cycles: 5E4  
 Degree of Protection: IP55  
 UL, cUL (UL508, E195428)  
 Rated Voltage: 120V~ 220-240V~  
 Rated Current: 12A 1/2HP 16A 2HP  
 VDE,CE(DIN VDE61058, VDE0630)  
 Rated Voltage: 250V~  
 Rated Current: 10(8)A  
 Number of Operating Cycles: 5E4

**应用:**

该开关具有停电和欠电压保护功能。一旦断电或欠电压，开关自动断开。再来电时，须重新按开关。该专利技术体形小，电流大。

**参数:**

TUV(EN60947)  
 电压: 120V~ 220~250V~  
 电流: 16 (12) A AC-1:1.8A AC-3:15A  
 线圈电压: 220-240V~  
 额定频率: 50/60Hz  
 操作循环次数: 50000  
 防护等级: IP55  
 UL, cUL (UL508, E195428)  
 额定电压: 120V~ 220-240V~  
 额定电流: 12A 1/2HP 16A 2HP  
 VDE,CE(DIN VDE61058, VDE0630)  
 额定电压: 250V~  
 额定电流: 10(8)A  
 操作循环次数: 5E4

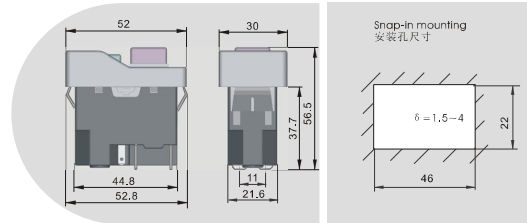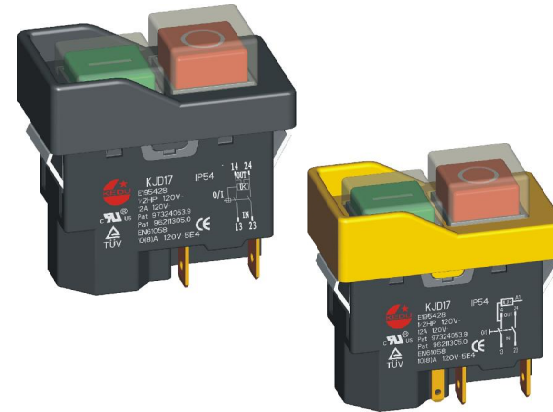

**Ordering Information. 货号编制:**



Panel 面板	Function 功能	Voltage/Frequency 电压/频率	Marking on Bottom 按钮标识	Attached 附件
1	1 No Remote Trip 无小插片	1 120V~/50Hz	1	1 No Attached 无附件
2	2 With Remote Trip 带小插片	2 120V~/60Hz	2	2 With Protection Cover 带防水罩
		3 230V~/50Hz		
		4 230V~/60Hz		
		5 240V~/50Hz		
		6 240V~/60Hz		3 With Protection Cover and Rubber pads 带防水罩和橡胶垫

# 109

- Restart Protection Function
- More than 20 patents
- Many Certified
- Full-function
- With outlet socket & plug
- Install simply
- Reversing switch to control motor's direction
- Safety

本厂设计的停电保护开关，获20多项国家专利，并取得多国安规认证，其功能齐全：如急停盖能紧急停止和带锁扣功能。防水罩能防水防尘。盒装插座和插头，连接电源方便安全。装上转换开关，能控制马达正反向。供各种电压可选择的停电保护功能，为机械和马达以及电力拖动控制，家电保护时更加安全可靠。