




KJD17B

ELECTROMAGNETIC SWITCH 电磁开关

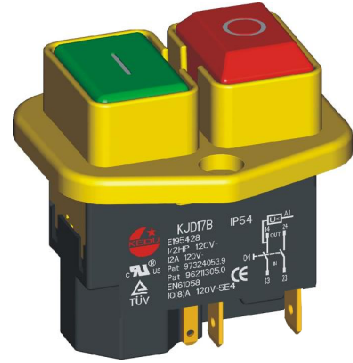

Applications:

Integration switch with restart and undervoltage protection. If Power supply fails down, switching contacts open. The patent of switch is high current in small size.

Specifications:



TUV(EN60947)
 Rated Voltage: 120V~ 220-250V~
 Rated Current: 16 (12) A AC-1:18A AC-3:15A
 Uc: 220-240V~
 Rated Frequency: 50/60Hz
 Number of Operating Cycles: 5E4
 Degree of Protection: IP55
 UL, cUL (UL508, E195428)
 Rated Voltage: 120V~ 220-240V~
 Rated Current: 12A 1/2HP 16A 2HP
 VDE,CE(DIN VDE61058, VDE0630)
 Rated Voltage: 250V~
 Rated Current: 10(8)A
 Number of Operating Cycles: 5E4

应用:


该开关具有停电和欠电压保护功能。一旦断电或欠电压, 开关自动断开, 再来电时, 须重新按开关。该专利技术体形小, 电流大。

参数:


TUV(EN60947)
 电压: 120V~ 220~250V~
 电流: 16 (12) A AC-1:18A AC-3:15A
 线圈电压: 220-240V~
 额定频率: 50/60Hz
 操作循环次数: 50000
 防护等级: IP55
 UL, cUL (UL508, E195428)
 额定电压: 120V~ 220-240V~
 额定电流: 12A 1/2HP 16A 2HP
 VDE,CE(DIN VDE61058, VDE0630)
 额定电压: 250V~
 额定电流: 10(8)A
 操作循环次数: 5E4

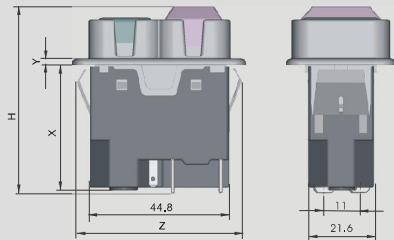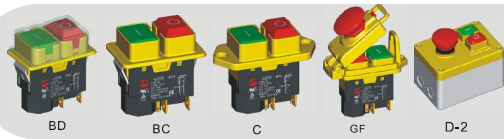

Snap-in mounting 安装孔尺寸



	B	C	GF	BD	BC
X	37.4	37.4	41.8	40.2	40
Y	7.4	5	2	2.4	2.4
H	73.4	60.4	77.4	60.4	60.4
Z				53.5	52.8

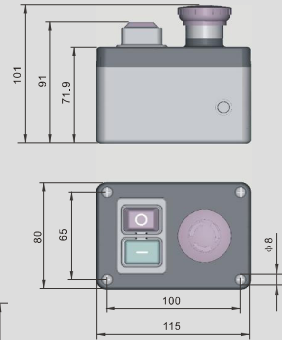

KJD17B

ELECTROMAGNETIC SWITCH 电磁开关

Ordering Information. 货号编制:

Type: 型号: **KJD17B**

Art. No.: 货号: **11172**

Panel 面板	Function 功能	Voltage/Frequency 电压/频率	Marking on Button 按钮标识	Attached 附件
1	1 With Remote Trip 带小插片	1 120V~/50Hz	1	1 No Attached 无附件
2	2 Without Remote Trip 不带小插片	2 120V~/60Hz	2	2 With Protection Cover 带防水罩(C)
3	3 NO+NC	3 230V~/50Hz	3	3 With Emergency Stop And Protection Cover 带急停和防水罩
4		4 230V~/60Hz		4 With Rubber Gasket and protection cover 带橡胶密封和防水罩
5		5 240V~/50Hz		5 With Rubber Housing 带橡胶罩
6		6 240V~/60Hz		6 With Emergency Stop Of Mounting Boxes 带急停底座
			9 With Protection Cover 带防水罩(B)	7 With Protection Cover 带防水罩(D)
			8 With Protection Cover 带防水罩(B)	